


MF series Metal Film Fixed Resistors

◆ Features

- » Body Coating: Epoxy is Light Blue. Silicone Flame proof is Gray (FMF Type).
- » Low T.C.R. 200ppm, 100ppm, 50ppm, 25ppm, 15ppm, 10ppm, 5ppm.
- » High precision 5%, 1%, 0.5%, 0.25%, 0.1%

◆ Power Ratings Dimensions

- » Standard Type: 1/8W ~ 5W
- » Miniature Type: 1/4Ws~5Ws

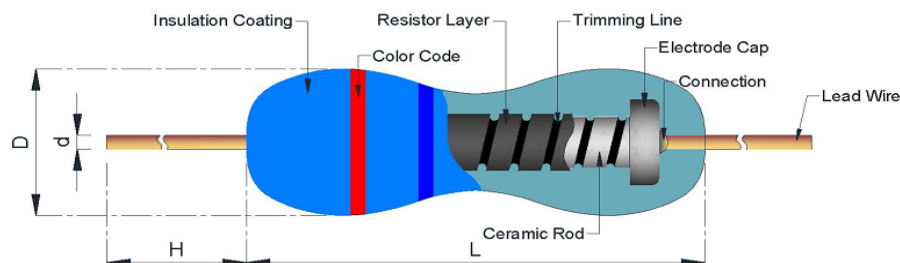

Type	DIMENSION(mm)				
	L		ØD	H	Ød
MF12 (1/8W)	3.3	+0.4 -0.2	1.8 ± 0.3	29 ± 2.0	0.45 ± 0.05
MF16 (1/6W)					
MFS25 (1/4WS)					
MF0204 (0.4W)		+0.7 -0.2			
MF25 (1/4W)					
MFS50 (1/2WS)	6.3 ± 0.5		2.3 ± 0.3	28 ± 2.0	0.55 ± 0.05
MF0207 (0.6W)					
MF50 (1/2W)	9.0 ± 0.5		3.2 ± 0.5	26 ± 2.0	0.55 ± 0.05
MFS100 (1WS)					
MF100 (1W)	11.5 ± 1.0		4.5 ± 0.5	35 ± 2.0	0.8 ± 0.05
MFS200 (2WS)					
MF200 (2W)	15.5 ± 1.0		5.0 ± 0.5	32 ± 2.0	0.8 ± 0.05
MFS300 (3WS)					
MF300 (3W)	17.5 ± 1.0		6.2 ± 0.5	32 ± 2.0	0.8 ± 0.05
MFS500 (5WS)					
MF500 (5W)	24.0 ± 1.0		8.5 ± 0.5	37 ± 2.0	0.8 ± 0.05



◆ Part Number

MF	12	F	2K3	T	
Type	Watt	Tolerance	R value	Packing	TCR Value
MF	1/8W = 12	J = ± 5%	2.3K = 2K3	T = Taping Box	Blank= Standard
MFS	1/6W = 16	G = ± 2%	10KΩ = 10K	B = Bulk	D = ±50ppm
	1/4W = 25	F = ± 1%		R = Taping Reel	C = ±25ppm
	0.4W = 0204	D = ± 0.5%		M = M Type	N = ±15ppm
	1/2W = 50	C = ± 0.25%		MB = MB Lead Form	B = ±10ppm
	0.6W = 0207	B = ± 0.1%		MK = MK Lead Form	S = ±5ppm
	1W = 100	A = ± 0.05%		F = F Lead Form	
	2W = 200			FC = FC Lead Form	
	3W = 300			FK = FK Lead Form	
	5W = 500			FCK = FCK Lead Form	
				FKK = FKK Lead Form	
				PANA = PNAN Lead Form (Only for 1/8W & 1/4W)	





◆ Electrical Characteristics

Power rating at 70°C	Resistance		Operating Temp. Range	Max. Working Voltage	Max. Overload Voltage	Dielectric withstanding voltage	
	Range (Ω) 0.5% / 1% / 5%	Range (Ω) 0.25% / 0.1%					
1/8W	0.1Ω~1M	10Ω~1M	-55°C to +155°C	150V	300V	300V	
1/6W				150V	300V		
0.4W				200V	400V		
1/4W				250V	500V	400V	
0.6W				300V	500V	400V	
1/2W				350V	500V	500V	
1W				500V	700V	700V	
2W				500V	1000V	1000V	
3W	0.1Ω~1M	---		500V	1000V	1000V	
5W		---		500V	1000V	1000V	
1/4WS	0.1Ω~1M	10Ω~1M		200V	400V	300V	
1/2WS				300V	500V	400V	
1WS				400V	600V	500V	
2WS				500V	700V	700V	
3WS				500V	1000V	1000V	
5WS				0.1Ω~100K	---	500V	1000V

Value range for standard resistance, below or over this resistance on request.

Rated continuous Working Voltage (RCWV) = $\sqrt{\text{POWER.RATING} * \text{RESISTANCE.VALUE}}$

PS. Standard TCR: 1R-9R9=>200ppm; 10R-1M=>100ppm

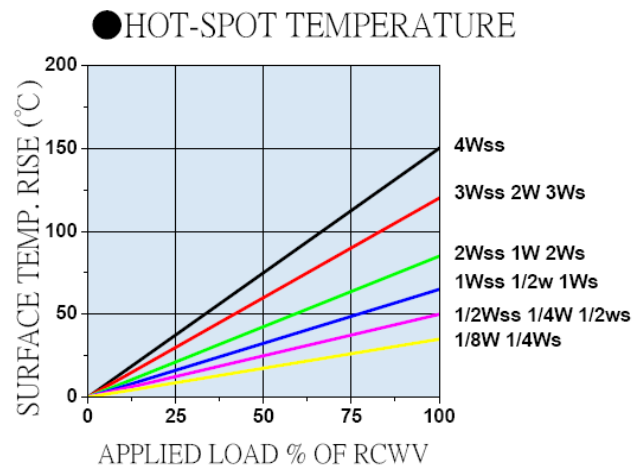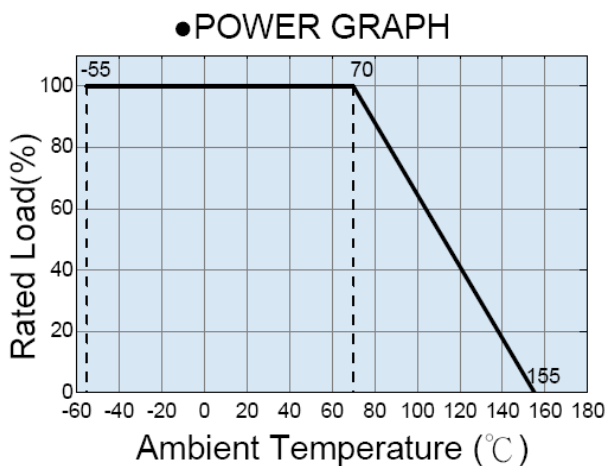




◆ Environmental Characteristics

Performance Test	Test Method	Appraise
SHORT TIME OVERLOAD	2.5 times RCWV for 5 seconds	As request
TEMPERATURE COEFFICIENT(T.C.R.)	Resistance value at room Temperature and room Temperature+100°C	By Type
VOLTAGE PROOF	In V-Block for 60 seconds	By Type
PULSE OVERLOAD	4 times RCWV for 10000 cycles (1sec.on , 25secs.off)	±(0.75%+0.05Ω)
INSULATION RESISTANCE	In V-Block	> 10000MΩ
LOAD LIFE	70°C at RCWV for 1000hrs.(1.5hrs. on , 0.5hrs.off)	±(1.5%+0.05Ω)
LOAD LIFE IN HUMIDITY	40±2°C 90~95%RH at RCWV for 1000hrs. (1.5hrs. on , 0.5hrs.off)	±(1.5%+0.05Ω)
TEMPERATURE CYCLING	-40°C/85°C with 1000 cycles. (20min for both low and high Temperature , transfer time less 30s)	±(0.75%+0.05Ω)
SOLDER ABILITY	260±5°C for 2±0.5 seconds	95% min. coverage
RESISTANCE TO SOLDERING HEAT	The solder iron heated to 350°C ±10°C and applied to the termination for a duration of 4 seconds to 5 seconds.	±(0.25%+0.05Ω)
RESISTANCE TO SOLVENT	Trichloroethane for 1 min. with ultrasonic	No deterioration of coatings and markings
TERMINAL STRENGTH	Direct load for 10 sec. In the direction off the terminal leads.	Tensile: ≥2.5kg


◆ **Packing Methods** Bandoleer for Axial leads

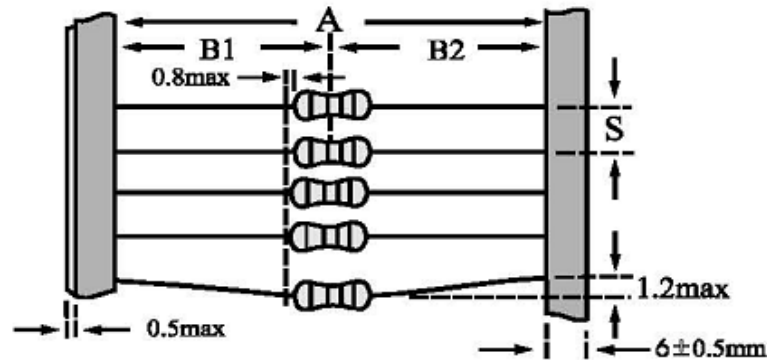


Type	Dimensions (mm)			
	A	B1-B2	S (spacing)	Max. deviation of spacing
1/8W 1/6W 1/4WS 0.4W (0204)	52	+1	1.2	5
		-0		
	26	+1	1	
		-0		
1/4W 1/2WS 0.6W(0207)	52	+1	1.2	5
		-0		
	26	+1	1	
		-0		
1/3W	52	+1 -0	1.2	5
1/2W 1WS	52	+1 -0	1.2	5
1W 2WS	52	+1	1.5	5
		-0		
	73	+1	1.5	
		-0		
2W 3WS	52	+1	1.5	10
		-0		
	73	+1	1.5	
		-0		
3W	52	+1	1.5	10
		-0		
5WS	73	+1	1.5	
		-0		
5W 7WS	88	+1	1.5	10
		-0		

◆ Lead Forming


M Lead Form

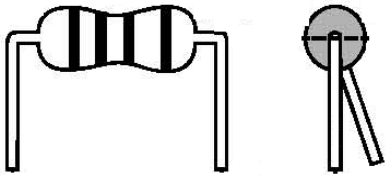

MB Lead Form

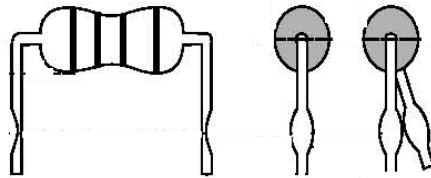


MK Lead Form

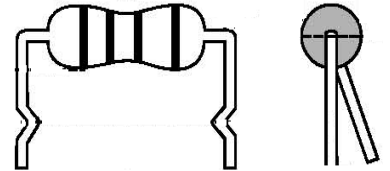


F Lead Form




FK Lead Form

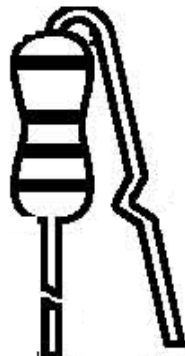

FC Lead Form



FCK Lead Form



FKK Lead Form

